



Insert heading

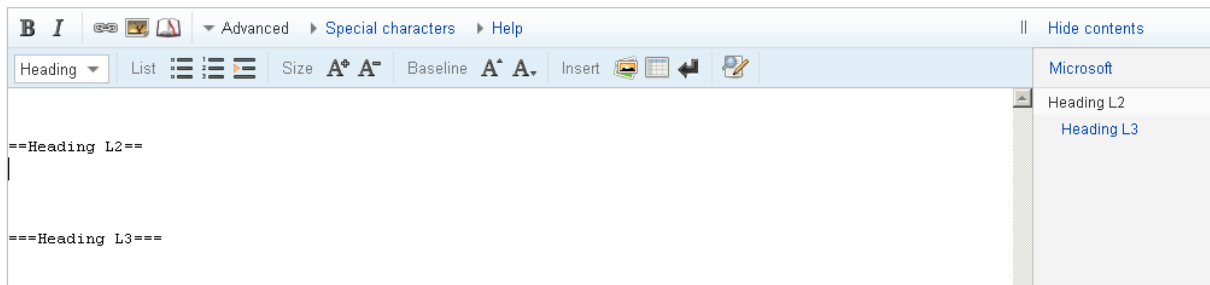

A screenshot of a rich text editor interface. The top toolbar includes options for Bold (B), Italic (I), and a 'Heading' dropdown menu. The 'Heading' dropdown is currently set to 'Heading L2'. Below the toolbar, the text area contains two lines of heading markup: `==Heading L2==` followed by a blank line, and `===Heading L3===`. On the right side, a 'Hide contents' button is visible, and a table of contents (TOC) pane shows 'Microsoft' at the top, followed by 'Heading L2' and 'Heading L3'.


Select level 3 heading and convert it to level 2

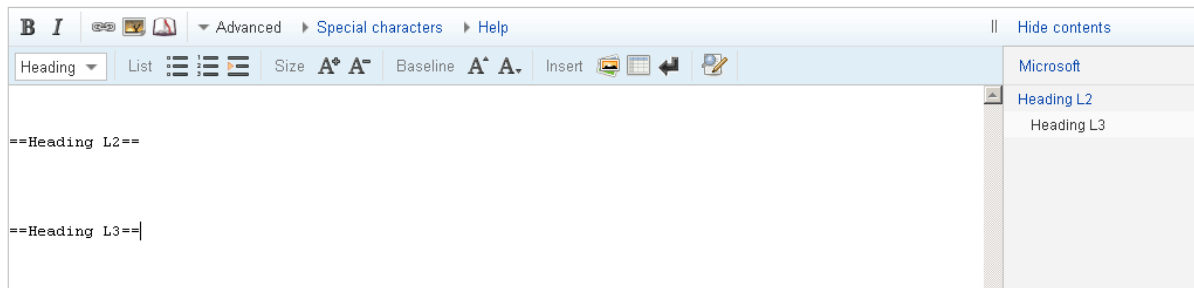

A screenshot of the same rich text editor interface. The 'Heading' dropdown menu is now set to 'Heading L3'. The text area shows `==Heading L2==` followed by a blank line, and `===Heading L3==|` with the cursor at the end. The TOC pane on the right still shows 'Microsoft', 'Heading L2', and 'Heading L3'.

Heading in editor shows its level 2 but the heading in NTOC shows it's level3

Once it preview the correct format shows

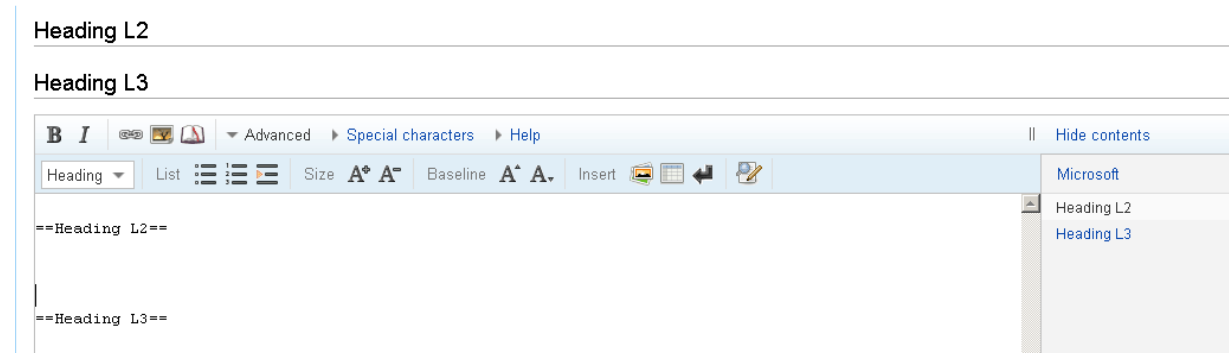

A screenshot of the rich text editor interface. The text area shows `==Heading L2==` followed by a blank line, and `===Heading L3==`. The TOC pane on the right shows 'Microsoft', 'Heading L2', and 'Heading L3'. The heading 'Heading L2' in the TOC is highlighted with a blue background, indicating it is the current selection.